




E550



HSS Straight Flute Serial Hand Tap, Rc(BSPT), ISO Standard

Ideal for hand tapping tough materials. The straight flute design makes it ideal for both through and blind holes. Available as a single finishing tap or as a set of two serial taps, which should be used one after the other to create the full thread.

	ISO 2284	Normal
	1.5xD	HSS
C 2-3		
Bright		

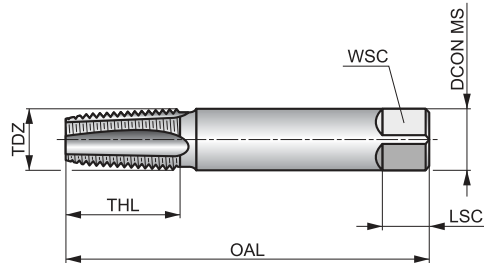

Workpiece material group suitability and starting values for cutting speed (m/min).

P1.1 ■7	P1.2 ■7	P1.3 ■8	P2.1 ■6	P2.2 ■5	P2.3 ▣4	P3.1 ■4	P3.2 ▣4	P4.1 ▣3	M1.1 ▣5	M1.2 ▣4	M2.1 ▣5	M2.2 ▣4	M3.1 ▣5
M3.2 ▣4	M3.3 ▣3	M4.1 ▣3	K1.1 ▣6	K1.2 ▣4	K1.3 ▣3	K2.1 ▣7	K2.2 ▣6	K3.1 ▣7	K3.2 ▣5	K4.1 ▣6	K4.2 ▣5	K5.1 ▣7	K5.2 ▣5
N1.3 ▣8	N2.1 ▣11	N2.2 ▣10	N2.3 ▣7	N3.1 ■17	N3.2 ■10	N3.3 ▣5	N4.2 ▣5	N4.3 ▣3					

Product	TDZ	TPI	TD	OAL	THL	DCON MS	WSC	LSC	NOF	PHD
			[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		
E5501/8	1/8	28	9.728	59.0	15	8.00	6.30	9	3	8.40
E5501/8N07	1/8	28	9.728	59.0	15	8.00	6.30	9	3	8.40
E5501/4	1/4	19	13.157	67.0	19	10.00	8.00	11	3	11.20
E5501/4N07	1/4	19	13.157	67.0	19	10.00	8.00	11	3	11.20
E5503/8	3/8	19	16.662	75.0	21	12.50	10.00	13	3	14.75
E5503/8N07	3/8	19	16.662	75.0	21	12.50	10.00	13	3	14.75
E5501/2	1/2	14	20.955	87.0	26	16.00	12.50	16	5	18.25
E5501/2N07	1/2	14	20.955	87.0	26	16.00	12.50	16	5	18.25
E5503/4	3/4	14	26.441	96.0	28	20.00	16.00	20	5	23.75
E5503/4N07	3/4	14	26.441	96.0	28	20.00	16.00	20	5	23.75
E5501	1"	11	33.249	109.0	33	25.00	20.00	24	5	30.00
E5501.1/4	1.1/4	11	41.910	119.0	36	31.50	25.00	28	5	38.50
E5501.1/2	1.1/2	11	47.803	125.0	37	35.50	28.00	31	7	44.50
E5502	2"	11	59.614	140.0	41	40.00	31.50	34	7	56.00