




Suitability and starting values for cutting speed (vc) and feed (f). Refer to our Machining Calculator app for further calculations.

Product	RE [mm]	P		M		K		N		S		H		PSIRR [°]	PSIRL [°]
		vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]		




TN-F2 geometry for parting-off and grooving, and continuous cuts.

LFMX 3.1-.20TNF2	6640	0.2	150	0.10	90	0.09	140	0.10	-	-	-	-	-	-	-
	T8330	0.2	130	0.10	75	0.09	120	0.10	-	-	-	-	-	-	-
LFMX 4.1-.20TNF2	T8330	0.2	130	0.12	75	0.11	120	0.12	-	-	-	-	-	-	-

## LFMX - M2




	CW [mm]	CWTOLL [mm]	CWTOLU [mm]	BW [mm]
2.0	2.00	-0.03	0.03	1.60
2.2	2.20	-0.03	0.03	1.60
3.1	3.10	-0.04	0.04	2.60
4.1	4.10	-0.04	0.04	3.60
5.1	5.10	-0.04	0.04	4.60
6.35	6.35	-0.04	0.04	5.80

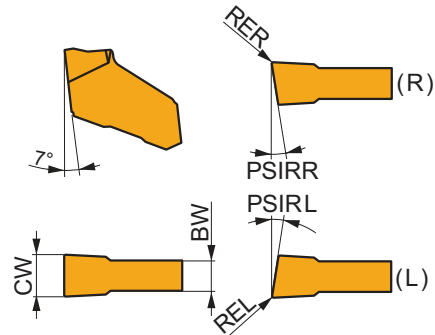



Suitability and starting values for cutting speed (vc) and feed (f). Refer to our Machining Calculator app for further calculations.

Product	RE [mm]	P		M		K		N		S		H		PSIRR [°]	PSIRL [°]
		vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]	vc [m/min]	f [mm/rev]		




SN-M2 geometry for parting-off and grooving, and continuous to slightly interrupted cuts.

LFMX 2.0-.16SNM2	6640	0.2	150	0.11	90	0.10	140	0.11	-	-	-	-	-	-	-
	T8330	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	-	-	-
LFMX 2.2-.16SNM2	6640	0.2	150	0.11	90	0.10	140	0.11	-	-	-	-	-	-	-
	T8330	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	-	-	-
LFMX 3.1-.20SNM2	6640	0.2	150	0.15	90	0.14	140	0.15	-	-	-	-	-	-	-
	T8330	0.2	130	0.15	75	0.14	120	0.15	-	-	-	-	-	-	-
LFMX 4.1-.20SNM2	6640	0.2	150	0.15	90	0.14	140	0.15	-	-	-	-	-	-	-
	T8330	0.2	130	0.15	75	0.14	120	0.15	-	-	-	-	-	-	-
LFMX 5.1-.20SNM2	6640	0.2	150	0.20	90	0.18	140	0.20	-	-	-	-	-	-	-
	T8330	0.2	130	0.20	75	0.18	120	0.20	-	-	-	-	-	-	-
LFMX 6.35-.20SNM2	6640	0.2	150	0.20	90	0.18	140	0.20	-	-	-	-	-	-	-
	T8330	0.2	130	0.20	75	0.18	120	0.20	-	-	-	-	-	-	-



SR-M2 geometry, with right-handed design, for parting-off, and continuous to slightly interrupted cuts.

LFMX 2.0-.16SR12M2	T8330	0.2	130	0.09	75	0.08	120	0.09	-	-	-	-	12	-
LFMX 2.0-.16SR6M2	T8330	0.2	130	0.09	75	0.08	120	0.09	-	-	-	-	6	-
LFMX 3.1-.20SR8M2	T8330	0.2	130	0.11	75	0.10	120	0.11	-	-	-	-	8	-
LFMX 4.1-.20SR8M2	T8330	0.2	130	0.15	75	0.14	120	0.15	-	-	-	-	8	-



M2-SL geometry, with left-handed design, for parting-off, and continuous to slightly interrupted cuts.

LFMX 2.0-.16SL12M2	T8330	0.2	130	0.09	75	0.08	120	0.09	-	-	-	-	-	12
LFMX 2.0-.16SL6M2	T8330	0.2	130	0.09	75	0.08	120	0.09	-	-	-	-	-	6