

CoroCut® 1-2

Parting, profiling and grooving operations

Application

- Parting off
- External grooving
- Internal grooving
- Face grooving
- Profiling

ISO application area:



Benefits and features

- Strong tool material alloy for high fatigue resistance
- Plug and play adaptors make it easy to connect the coolant
- Easy to change inserts: no torque wrench needed – always correct clamping with quick-release key

Note: In parting off and grooving CoroCut® 1-2 is the best choice to depths where the 2-edged inserts can be used.

www.sandvik.coromant.com/corocut1-2

Inserts

- Geometries and grades for all applications and feeds
- Insert grades in advanced cutting materials PCD and CBN
- Wiper inserts for excellent surface finish

Tools


- Coromant Capto® cutting units
- Shank tools
- QST™ shanks
- Parting blades
- Boring bars
- CoroTurn® SL heads

Rigid spring clamping

The system combines rigid spring clamping mechanism with railed insert seat and long inserts for exceptional stability.

Over- and under coolant

Tools with internal over- and under coolant available for best chip control and tool life.



B4



B4




B4



H35

CoroCut® 1-2 shank tool for parting and grooving

Screw clamp design

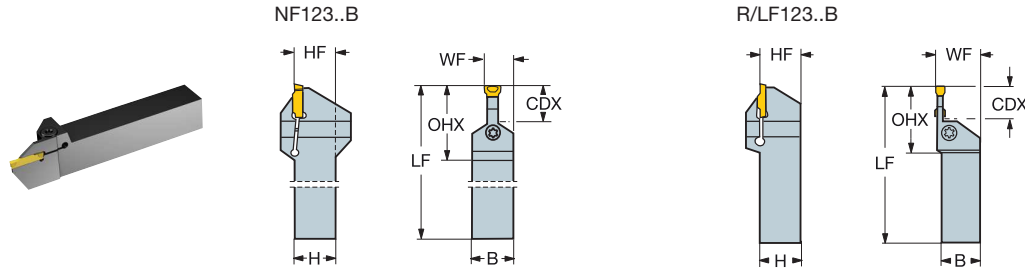

SSC	CZC _{MS}	CDX	OHX	Ordering code	Dimensions, mm							MIID
					B	H	LF	WF	HF	NM	KG	
D	16 x 16	8.0	25.5	R/LF123D08-1616B	16.0	16.0	100.0	17.0	16.0	2.5	0.22	N123D2-0150-0002-CM
	16 x 16	15.0	33.5	R/LF123D15-1616B	16.0	16.0	100.0	17.0	16.0	3.5	0.20	N123D2-0150-0002-CM
	20 x 20	8.0	25.5	R/LF123D08-2020B	20.0	20.0	125.0	21.0	20.0	2.5	0.40	N123D2-0150-0002-CM
	20 x 20	15.0	33.5	R/LF123D15-2020B	20.0	20.0	125.0	21.0	20.0	3.5	0.38	N123D2-0150-0002-CM
	25 x 25	8.0	25.5	R/LF123D08-2525B	25.0	25.0	150.0	26.0	25.0	2.5	0.72	N123D2-0150-0002-CM
	25 x 25	15.0	33.5	R/LF123D15-2525B	25.0	25.0	150.0	26.0	25.0	3.5	0.72	N123D2-0150-0002-CM
E	16 x 16	8.0	25.5	R/LF123E08-1616B	16.0	16.0	125.0	17.0	16.0	2.5	0.26	N123E2-0200-0002-CM
	16 x 16	15.0	33.5	R/LF123E15-1616B	16.0	16.0	125.0	17.0	16.0	4.0	0.25	N123E2-0200-0002-CM
	20 x 20	8.0	25.5	R/LF123E08-2020B	20.0	20.0	125.0	21.0	20.0	2.5	0.38	N123E2-0200-0002-CM
	20 x 20	15.0	33.5	R/LF123E15-2020B	20.0	20.0	125.0	21.0	20.0	4.0	0.36	N123E2-0200-0002-CM
	25 x 25	8.0	25.5	R/LF123E08-2525B	25.0	25.0	150.0	26.0	25.0	2.5	0.72	N123E2-0200-0002-CM
	25 x 25	15.0	33.5	R/LF123E15-2525B	25.0	25.0	150.0	26.0	25.0	4.0	0.69	N123E2-0200-0002-CM
F	16 x 16	10.0	29.0	R/LF123F10-1616B	16.0	16.0	125.0	17.0	16.0	3.0	0.26	N123F2-0250-0002-CM
	16 x 16	20.0	22.4	R/LF123F20-1616B	16.0	16.0	125.0	17.0	16.0	4.0	0.25	N123F2-0250-0002-CM
	20 x 20	10.0	29.0	R/LF123F10-2020B	20.0	20.0	125.0	21.0	20.0	3.0	0.35	N123F2-0250-0002-CM
	20 x 20	20.0	22.4	R/LF123F20-2020B	20.0	20.0	125.0	21.0	20.0	4.0	0.36	N123F2-0250-0002-CM
	25 x 25	10.0	29.0	R/LF123F10-2525B	25.0	25.0	150.0	26.0	25.0	3.0	0.72	N123F2-0250-0002-CM
	25 x 25	20.0	22.4	R/LF123F20-2525B	25.0	25.0	150.0	26.0	25.0	4.0	0.67	N123F2-0250-0002-CM
	32 x 25	20.0	40.0	R/LF123F20-3225B	25.0	32.0	170.0	26.0	32.0	4.0	0.99	N123F2-0250-0002-CM
G	16 x 16	10.0	22.4	R/LF123G10-1616B	16.0	16.0	125.0	17.0	16.0	3.5	0.26	N123G2-0300-0003-TF
	16 x 16	20.0	41.0	R/LF123G20-1616B	16.0	16.0	125.0	17.0	16.0	5.0	0.26	N123G2-0300-0003-TF
	20 x 20	10.0	22.4	R/LF123G10-2020B	20.0	20.0	125.0	21.0	20.0	3.5	0.40	N123G2-0300-0003-TF
	20 x 20	20.0	41.0	R/LF123G20-2020B	20.0	20.0	125.0	21.0	20.0	5.0	0.36	N123G2-0300-0003-TF
	25 x 25	10.0	22.4	R/LF123G10-2525B	25.0	25.0	150.0	26.0	25.0	3.5	0.73	N123G2-0300-0003-TF
	25 x 25	20.0	41.0	R/LF123G20-2525B	25.0	25.0	150.0	26.0	25.0	5.0	0.68	N123G2-0300-0003-TF
	32 x 25	10.0	30.0	R/LF123G10-3225B	25.0	32.0	170.0	26.0	32.0	3.5	1.05	N123G2-0300-0003-TF
	32 x 25	20.0	41.0	R/LF123G20-3225B	25.0	32.0	170.0	26.0	32.0	5.0	0.99	N123G2-0300-0003-TF
	32 x 32	20.0	41.0	R/LF123G20-3232B	32.0	32.0	170.0	33.0	32.0	5.0	1.24	N123G2-0300-0003-TF
H	16 x 16	13.0	34.0	R/LF123H13-1616B	16.0	16.0	125.0	17.0	16.0	4.5	0.21	N123H2-0400-0004-TF
	16 x 16	25.0	47.0	R/LF123H25-1616B	16.0	16.0	125.0	17.0	16.0	7.0	0.26	N123H2-0400-0004-TF
	20 x 20	13.0	34.0	R/LF123H13-2020BM	20.0	20.0	125.0	21.0	20.0	4.5	0.41	N123H2-0400-0004-TF
	20 x 20	25.0	47.0	R/LF123H25-2020BM	20.0	20.0	125.0	21.0	20.0	7.0	0.39	N123H2-0400-0004-TF
	25 x 25	13.0	34.0	R/LF123H13-2525BM	25.0	25.0	150.0	26.0	25.0	4.5	0.73	N123H2-0400-0004-TF
	25 x 25	25.0	47.0	R/LF123H25-2525BM	25.0	25.0	150.0	26.0	25.0	7.0	0.68	N123H2-0400-0004-TF
	32 x 25	13.0	34.0	R/LF123H13-3225BM	25.0	32.0	170.0	26.0	32.0	4.5	1.05	N123H2-0400-0004-TF
	32 x 25	25.0	47.0	R/LF123H25-3225BM	25.0	32.0	170.0	26.0	32.0	7.0	0.97	N123H2-0400-0004-TF
	32 x 32	13.0	34.0	R/LF123H13-3232BM	32.0	32.0	170.0	33.0	32.0	4.5	1.31	N123H2-0400-0004-TF
	32 x 32	25.0	47.0	R/LF123H25-3232BM	32.0	32.0	170.0	33.0	32.0	7.0	1.22	N123H2-0400-0004-TF
J	20 x 20	13.0	34.0	R/LF123J13-2020BM	20.0	20.0	125.0	21.0	20.0	5.0	0.41	N123J2-0500-0002-CM
	25 x 25	13.0	34.0	R/LF123J13-2525BM	25.0	25.0	150.0	26.0	25.0	5.0	0.73	N123J2-0500-0002-CM
	25 x 25	22.0	30.0	R/LF123J22-2525B	25.0	25.0	150.0	26.0	25.0	6.0	0.70	N123J2-0500-0004-TF
	25 x 25	32.0	57.0	R/LF123J32-2525BM	25.0	25.0	150.0	26.0	25.0	7.5	0.68	N123J2-0500-0002-CM
	32 x 25	13.0	34.0	R/LF123J13-3225BM	25.0	32.0	170.0	26.0	32.0	5.0	1.05	N123J2-0500-0002-CM
	32 x 25	32.0	57.0	R/LF123J32-3225BM	25.0	32.0	170.0	26.0	32.0	7.5	0.97	N123J2-0500-0002-CM
	32 x 32	13.0	34.0	R/LF123J13-3232BM	32.0	32.0	170.0	33.0	32.0	5.0	1.32	N123J2-0500-0002-CM
	32 x 32	32.0	57.0	R/LF123J32-3232BM	32.0	32.0	170.0	33.0	32.0	7.5	1.21	N123J2-0500-0002-CM

SSC = To correspond with SSC on insert.

R = Right hand, L = Left hand

