


STN16



PRAMET



S

ECON TN16 Square Shoulder Mill with Internal Coolant






90° end and shell mills utilising double sided TNGX 16 inserts with 6 cutting edges and APMX of 10 mm. Suitable for a wide range of applications. Available in cylindrical, weldon, modular and arbor (with differential tooth pitch) style, in Ø25 up to Ø175 mm. Body treated for longer tool life.



KAPR	90°
APMX	10.0 mm



ECON TN

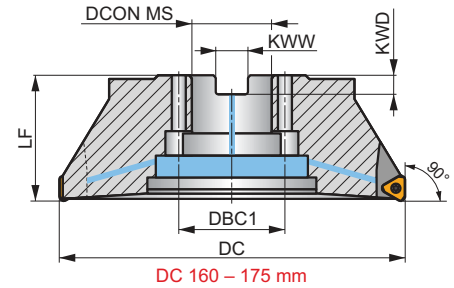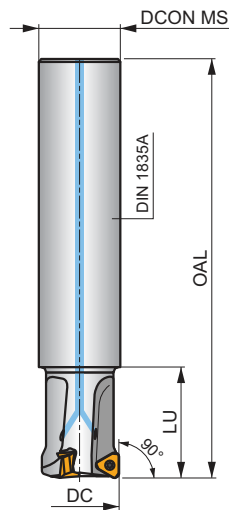

h_m 0.03 - 0.15

h_m 0.03 - 0.13



Product	DC	OAL	DCON MS	DCCB	DBC1	LU	LF	TDZ	KWW	KWD	GAMP	GAMP									max.	
																					[mm]	[mm]
25A2R034A25-STN16-C	25	170	25	-	-	34	-	-	-	-	-18.5	-9.5	2	-	20000	✓	0.54	GI340	C0382			
32A2R034A32-STN16-C	32	195	32	-	-	34	-	-	-	-	-16	-9.5	2	-	17500	✓	1.05	GI340	C0382			
25A2R080A25-STN16-C	25	170	25	-	-	80	-	-	-	-	-18.5	-9.5	2	-	20000	✓	0.48	GI340	C0382			
32A2R080A32-STN16-C	32	195	32	-	-	80	-	-	-	-	-16	-9.5	2	-	17500	✓	0.96	GI340	C0382			
32A3R034A32-STN16-C	32	195	32	-	-	34	-	-	-	-	-16	-9.5	3	-	17500	✓	1.04	GI340	C0382			
35A3R034A32-STN16-C	35	195	32	-	-	34	-	-	-	-	-16	-9.5	3	-	17000	✓	1.07	GI340	C0382			
25A2R042B25-STN16-C	25	55	25	-	-	42	-	-	-	-	-18.5	-9.5	2	-	20000	✓	0.30	GI340	C0382			
32A3R042B32-STN16-C	32	110	32	-	-	42	-	-	-	-	-16	-9.5	3	-	17500	✓	0.52	GI340	C0382			
40A4R050B32-STN16-C	40	120	32	-	-	50	-	-	-	-	-16	-9.5	4	-	16000	✓	0.67	GI340	C0382			
25A2R033M12-STN16-C	25	55	12.5	-	-	-	33	M12	-	-	-18.5	-9.5	2	-	20000	✓	0.08	GI340	C0382			
32A2R043M16-STN16-C	32	66	17	-	-	-	43	M16	-	-	-16	-9.5	2	-	17500	✓	0.18	GI340	C0382			
32A3R043M16-STN16-C	32	66	17	-	-	-	43	M16	-	-	-16	-9.5	3	-	17500	✓	0.17	GI340	C0382			
40A3R043M16-STN16-C	40	66	17	-	-	-	43	M16	-	-	-16	-9.5	3	-	16000	✓	0.20	GI340	C0382			
40A4R043M16-STN16-C	40	66	17	-	-	-	43	M16	-	-	-16	-9.5	4	-	16000	✓	0.21	GI340	C0382			
40A03R-S90TN16-C	40	40	16	12.4	-	-	40	-	8.4	5.6	-16	-9.5	3	-	16000	✓	0.20	GI340	C0384			
40A04R-S90TN16-C	40	40	16	12.4	-	-	40	-	8.4	5.6	-16	-9.5	4	-	16000	✓	0.20	GI340	C0384			
50A04R-S90TN16-C	50	40	22	18.1	-	-	40	-	10.4	6.3	-16	-9.5	4	✓	14000	✓	0.34	GI340	C0386			
50A05R-S90TN16-C	50	40	22	18.1	-	-	40	-	10.4	6.3	-16	-9.5	5	✓	14000	✓	0.32	GI340	C0386			
63A04R-S90TN16-C	63	40	22	18.1	-	-	40	-	10.4	6.3	-16	-9.5	4	✓	12500	✓	0.47	GI340	C0386			
63A06R-S90TN16-C	63	40	22	18.1	-	-	40	-	10.4	6.3	-16	-9.5	6	✓	12500	✓	0.48	GI340	C0386			
80A05R-S90TN16-C	80	50	27	22.1	-	-	50	-	12.4	7	-16	-9.5	5	✓	11000	✓	1.02	GI340	C0388			
80A07R-S90TN16-C	80	50	27	22.1	-	-	50	-	12.4	7	-16	-9.5	7	✓	11000	✓	1.05	GI340	C0388			
100A06R-S90TN16-C	100	50	32	45.1	-	-	50	-	14.4	8	-16	-9.5	6	✓	10000	✓	1.79	GI340	C0390			
100A08R-S90TN16-C	100	50	32	45.1	-	-	50	-	14.4	8	-16	-9.5	8	✓	10000	✓	1.66	GI340	C0390			
115A06R-S90TN16-C	115	50	32	45.1	-	-	50	-	14.4	8	-16	-9.5	6	✓	9500	✓	2.04	GI340	C0390			
125A07R-S90TN16-C	125	63	40	56.1	-	-	63	-	16.4	9	-16	-9.5	7	✓	9000	✓	3.05	GI340	C0390			
125A09R-S90TN16-C	125	63	40	56.1	-	-	63	-	16.4	9	-16	-9.5	9	✓	9000	✓	3.14	GI340	C0390			



Product	DC	OAL	D CON MS	D CB	D BC1	LU	LF	TDZ	KWW	KWD	GAMF	GAMP	max.		kg			
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[mm]	[°]	[°]						
140A08R-S90TN16-C	140	63	40	56.1	-	-	63	-	16.4	9	-16	-9.5	8	✓	8500	✓	3.69	GI340 C0390
160C10R-S90TN16-C	160	63	40	-	66.7	-	63	-	16.4	9.2	-16	-9.5	10	✓	8000	✓	5.16	GI340 C0394
175C10R-S90TN16-C	175	63	40	-	66.7	-	63	-	16.4	9.2	-16	-9.5	10	✓	7500	✓	5.99	GI340 C0394


GI340	TNGX1606..

C0382	US 44010-T15P	3.5	M 4	10	-	-	Flag T15P	-	-	-	-
C0384	US 44010-T15P	3.5	M 4	10	D-T08P/T15P	FG-15	-	HS 90835	-	-	-
C0386	US 44010-T15P	3.5	M 4	10	D-T08P/T15P	FG-15	-	HS 1030C	-	-	-
C0388	US 44010-T15P	3.5	M 4	10	D-T08P/T15P	FG-15	-	HS 1230C	-	-	-
C0390	US 44010-T15P	3.5	M 4	10	D-T08P/T15P	FG-15	-	-	-	-	-
C0394	US 44010-T15P	3.5	M 4	10	D-T08P/T15P	FG-15	-	HS 1240C	HSD 0825C	CAC 160C	-

TNGX 16





	IC	D1	L	S
	[mm]	[mm]	[mm]	[mm]
1606	9.525	4.40	16.50	6.58

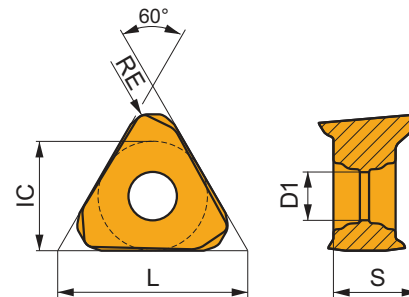

Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.

Product	RE	P			M			K			N			S			H		
		vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap
	[mm]	[m/min]	[mm/tooth]	[mm]	[m/min]	[mm/tooth]	[mm]	[m/min]	[mm/tooth]	[mm]	[m/min]	[mm/tooth]	[mm]	[m/min]	[mm/tooth]	[mm]	[m/min]	[mm/tooth]	[mm]








F geometry with highly positive design for light machining.

TNGX 160604SR-F	M8330	0.4	■	205	0.10	3.0	■	120	0.09	3.0	■	190	0.10	3.0	-	-	-	-	-	-
	M8340	0.4	■	190	0.10	3.0	■	110	0.09	3.0	■	180	0.10	3.0	-	-	-	-	-	-
TNGX 160608SR-F	8215	0.8	■	250	0.10	3.0	■	150	0.09	3.0	■	235	0.10	3.0	-	-	-	-	-	-
	M6330	0.8	■	215	0.10	3.0	■	150	0.09	3.0	-	-	-	-	-	-	-	-	-	-
	M8310	0.8	■	280	0.10	3.0	■	140	0.09	3.0	■	265	0.10	3.0	-	-	-	-	-	-
	M8330	0.8	■	245	0.10	3.0	■	145	0.09	3.0	■	230	0.10	3.0	-	-	-	-	-	-
	M8340	0.8	■	225	0.10	3.0	■	135	0.09	3.0	■	210	0.10	3.0	-	-	-	-	-	-




Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.

Product	RE [mm]	P			M			K			N			S			H						
		vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]				
		0.14																					
			M geometry with positive design for light to medium machining.																				
			TNGX 160604SR-M	8215	0.4	190	0.15	3.0	110	0.14	3.0	180	0.15	3.0	–	–	–	45	0.11	2.4	–	–	–
			M6330	0.4	165	0.15	3.0	115	0.14	3.0	–	–	–	–	–	–	45	0.11	2.4	–	–	–	
			M8310	0.4	205	0.15	3.0	100	0.14	3.0	190	0.15	3.0	–	–	–	–	–	–	–	–	–	
M8330	0.4	190	0.15	3.0	110	0.14	3.0	180	0.15	3.0	–	–	–	45	0.11	2.4	–	–	–				
M8340	0.4	170	0.15	3.0	100	0.14	3.0	160	0.15	3.0	–	–	–	40	0.11	2.4	–	–	–				
TNGX 160608SR-M	8215	0.8	230	0.15	3.0	135	0.14	3.0	215	0.15	3.0	–	–	–	55	0.11	2.4	–	–	–			
M6330	0.8	195	0.15	3.0	135	0.14	3.0	–	–	–	–	–	–	55	0.11	2.4	–	–	–				
M8310	0.8	245	0.15	3.0	120	0.14	3.0	230	0.15	3.0	–	–	–	–	–	–	–	–	–				
M8330	0.8	225	0.15	3.0	135	0.14	3.0	210	0.15	3.0	–	–	–	55	0.11	2.4	–	–	–				
M8340	0.8	205	0.15	3.0	120	0.14	3.0	190	0.15	3.0	–	–	–	50	0.11	2.4	–	–	–				
M8345	0.8	160	0.15	3.0	95	0.14	3.0	–	–	–	–	–	–	40	0.11	2.4	–	–	–				
M9325	0.8	285	0.15	3.0	–	–	–	270	0.15	3.0	–	–	–	–	–	–	–	–	–				
M9340	0.8	260	0.15	3.0	155	0.14	3.0	–	–	–	–	–	–	65	0.11	2.4	–	–	–				
TNGX 160612SR-M	M8330	1.2	235	0.15	3.0	140	0.14	3.0	220	0.15	3.0	–	–	–	55	0.11	2.4	–	–	–			
M8340	1.2	215	0.15	3.0	125	0.14	3.0	200	0.15	3.0	–	–	–	50	0.11	2.4	–	–	–				
TNGX 160616SR-M	M8310	1.6	275	0.15	3.0	140	0.14	3.0	260	0.15	3.0	–	–	–	–	–	–	–	–				
M8330	1.6	250	0.15	3.0	150	0.14	3.0	235	0.15	3.0	–	–	–	60	0.11	2.4	–	–	–				
M8340	1.6	225	0.15	3.0	135	0.14	3.0	210	0.15	3.0	–	–	–	55	0.11	2.4	–	–	–				






TNGX 16-FA

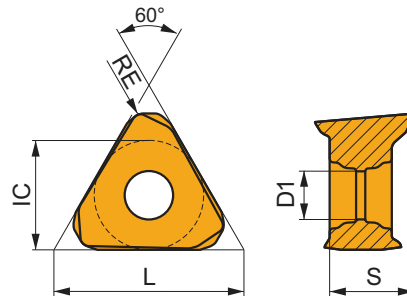


	IC [mm]	D1 [mm]	L [mm]	S [mm]
1606	9.525	4.40	16.50	6.58






Suitability and starting values for cutting speed (vc), feed (f) and depth of cut (ap). Refer to our Machining Calculator app for further calculations.

Product	RE [mm]	P			M			K			N			S			H			
		vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]	vc [m/min]	f [mm/tooth]	ap [mm]	
																				
		FA geometry with highly positive design for fine-finish to medium machining.																		
TNGX 160604FR-FA	HF7	0.4	–	–	–	–	–	–	–	–	–	255	0.14	2.0	–	–	–	–	–	–
	M0315	0.4	–	–	–	–	–	–	–	–	–	585	0.14	2.0	–	–	–	–	–	–
TNGX 160608FR-FA	HF7	0.8	–	–	–	–	–	–	–	–	–	300	0.14	2.0	–	–	–	–	–	–
	M0315	0.8	–	–	–	–	–	–	–	–	–	690	0.14	2.0	–	–	–	–	–	–







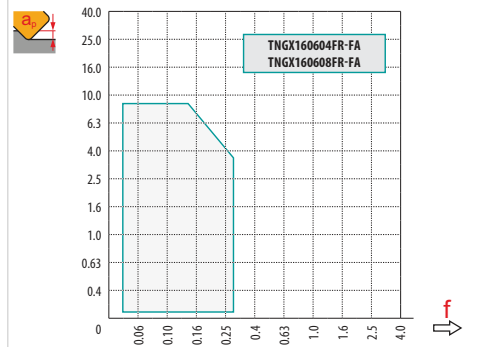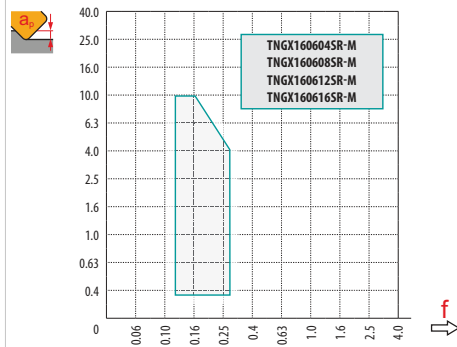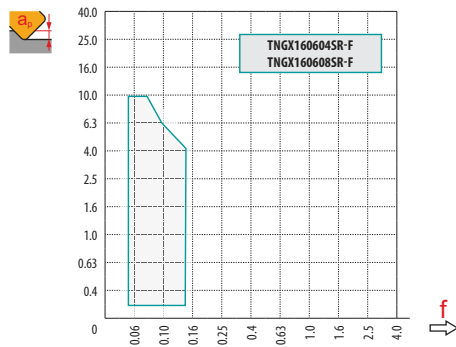





a_e / DC	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	TNGX 16-F		TNGX 16-M				TNGX 16-FA	
	0.4	0.8	0.4	0.8	1.2	1.6	0.4	0.8
	2.10	1.9	2.10	1.90	1.73	1.14	2.10	1.90



	3.0	4.5	6.0
	0.18	0.14	0.10



DC	 min	$d_{\min} = DC^*$			$d = 1.25 DC$			$d = 1.5 DC$			$d = 1.75 DC$			$d \geq 2 DC$	
		 SMAX	$a_{e \max}$		 SMAX	$a_{e \max}$		 SMAX	$a_{e \max}$		 SMAX	$a_{e \max}$		 SMAX	$a_{e \max}$
25	25	0.14	1.3	31	0.22	2.2	38	0.33	3.0	44	0.60	4.0	50	0.70	5.0
32	32	0.16	1.5	40	0.33	2.8	48	0.44	4.0	56	0.70	5.0	64	0.90	6.5
40	40	0.22	2.0	50	0.38	3.5	60	0.55	5.0	70	0.90	6.5	80	1.15	8.0
50	50	0.27	2.5	63	0.50	4.5	75	0.70	6.5	88	1.00	8.0	100	1.40	10.0
63	63	0.33	3.2	80	0.60	5.5	95	0.90	8.0	110	1.45	10.0	125	1.80	12.5
80	80	0.55	4.0	100	1.00	7.0	120	1.45	10.0	140	2.15	13.0	160	2.60	16.0
100	100	0.70	5.0	125	1.20	9.0	150	1.80	12.5	175	2.70	16.5	200	3.30	20.0
115	115	0.85	6.0	145	1.50	10.0	175	1.90	14.5	200	2.80	19.0	230	3.80	23.0
125	125	0.90	6.5	155	1.60	11.0	190	2.30	15.5	220	3.10	20.0	250	4.10	25.0
140	140	1.00	7.0	175	1.80	12.5	210	2.60	17.5	245	3.70	23.0	280	4.60	28.0
160	160	1.20	8.0	200	2.00	14.0	240	2.90	20.0	280	4.30	26.0	320	5.30	32.0
175	175	1.30	8.8	220	2.20	15.5	265	3.20	22.0	305	4.70	29.0	350	5.80	35.0

* Check feed rate reduction when hole diameter is between $d_{\min} - 1.5 DC$.

